


Telescopic belt conveyor

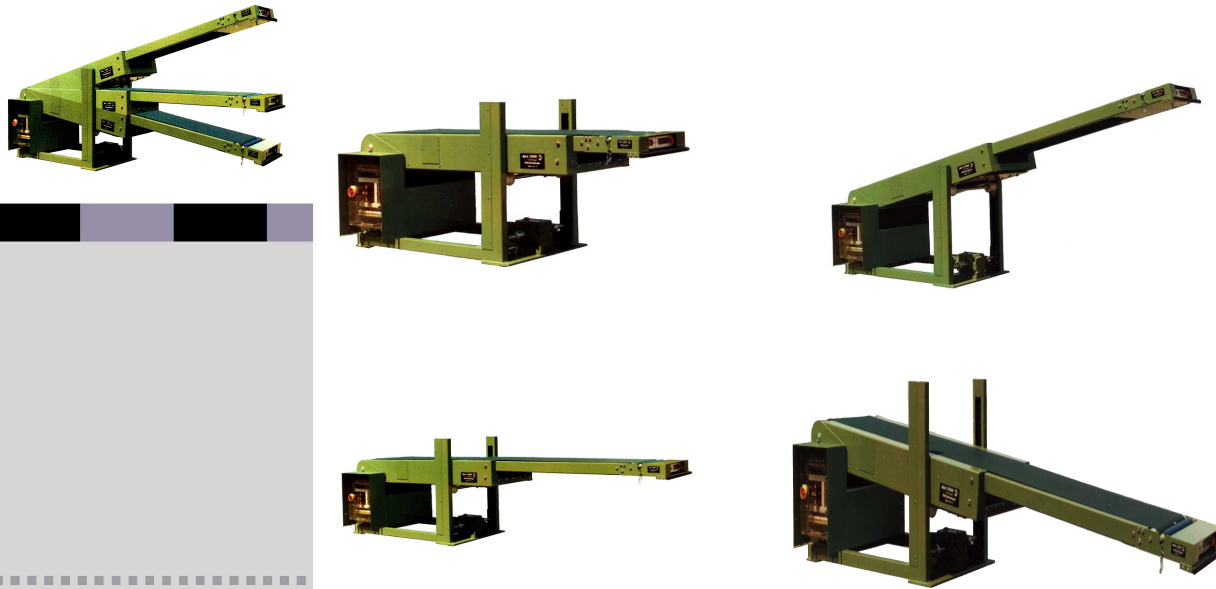

**MAX DÖRR
FÖRDERANLAGEN**
 Max Dörr Förderanlagen GmbH
 Robert-Bosch-Straße 2
 D-75050 Gemmingen
 Tel.: +49 (0) 72 67/91 22-0
 Fax: +49 (0) 72 67/91 22-22
 E-Mail: info@max-doerr.de
 Internet: www.max-doerr.de

DÖRR Telescopic belt conveyors are developed for transportation of units up to 30 kg.
 Mainly used for loading and unloading of trucks and vans.

Control station with push buttons, placed at the front and main part of conveyor, ensure easy and quick handling.

Emergency stop controls on the main and telescopic part of conveyor as well as a safety bar at the front of telescopic part ensure safe working

Standard conveyors					
Total length retracted	Total length extended	Loading height	Loading height extended	Useable width	Conveying speed
2400	3600	850	400 – 1600	500/600	bis 0,5 m/s
3200	5000	850	400 – 1600	500/600	bis 0,5 m/s
2400	4600	850	400 – 1600	500/600	bis 0,5 m/s
3000	5460	850	560 – 2600	500/600	bis 0,5 m/s
3750	7250	850	560 – 2600	500/600	bis 0,5 m/s
4650	9950	850	560 – 2600	500/600	bis 0,5 m/s

all details in mm

Other dimensions or optional equipment on request (e. g. turning gear, manual or automatic traverse unit etc).

